
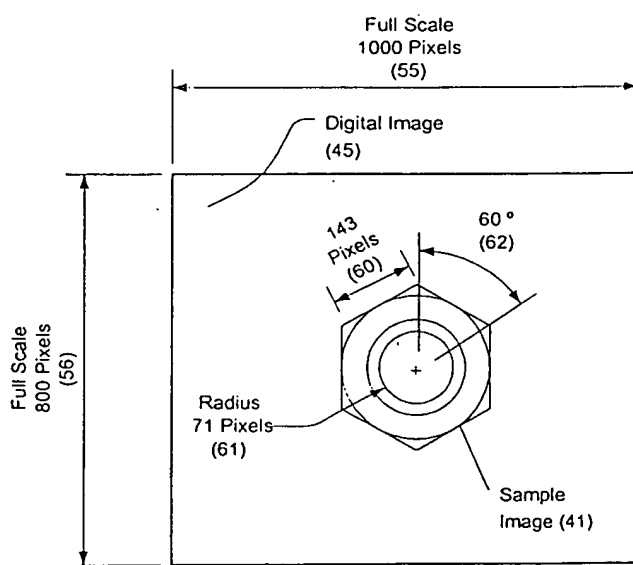



Fig 1
PRIOR ART

Fig. 1A
PRIOR ART

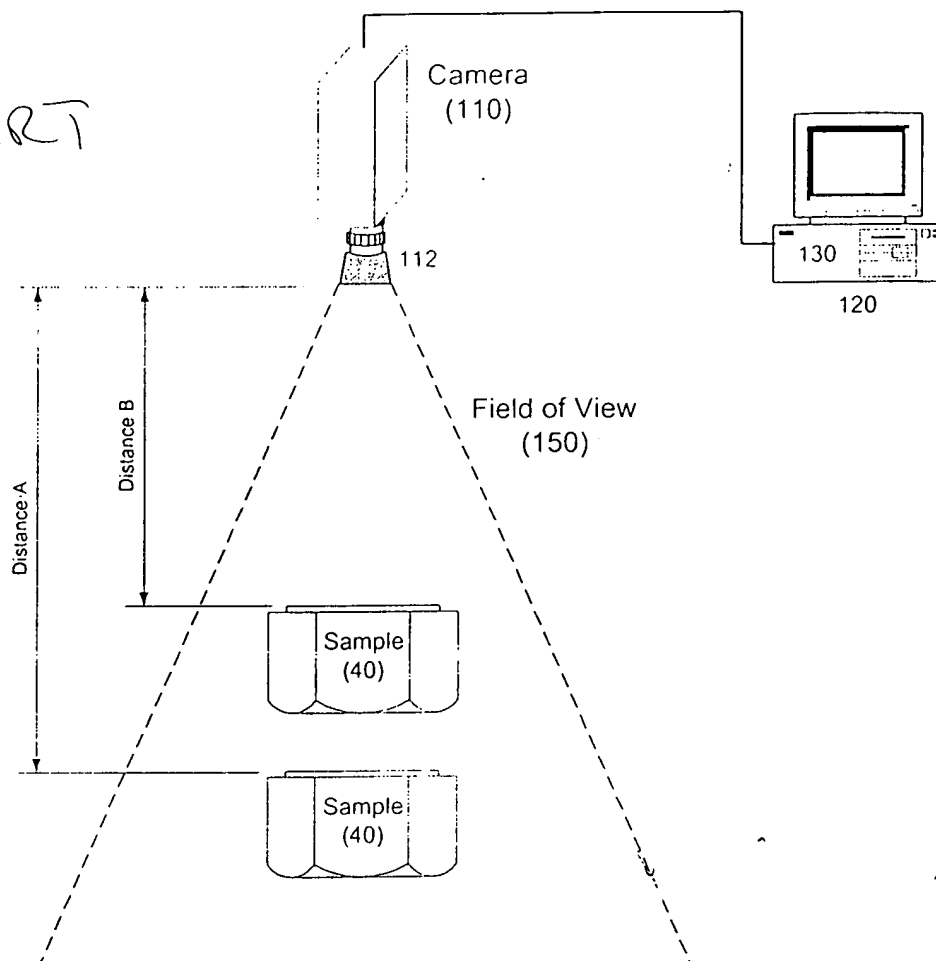

DISTANCE "A"


Fig 1B
PRIOR ART

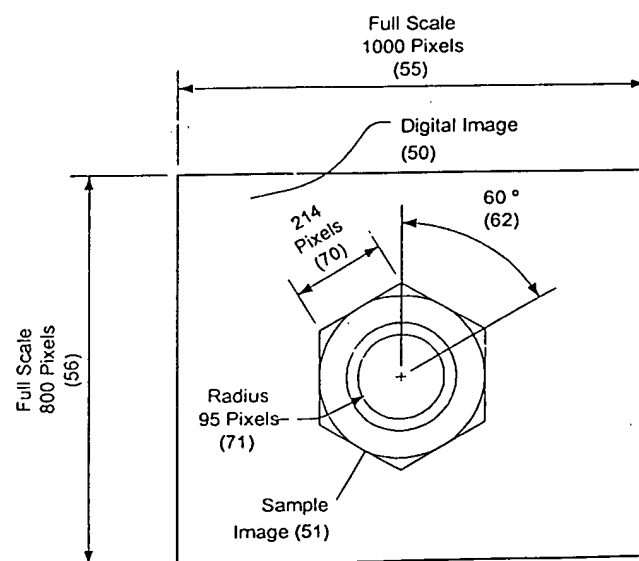

DISTANCE "B"

Fig 1C
PRIOR ART

A hand-drawn sketch of a rectangular area, possibly representing a field or a plot. The sketch is drawn with dark ink on a light background. The rectangle is slightly tilted. To the right of the rectangle, there is a wavy line that looks like a stylized 'S' or a series of connected curves. Next to this wavy line, the number '260' is written in a handwritten style.




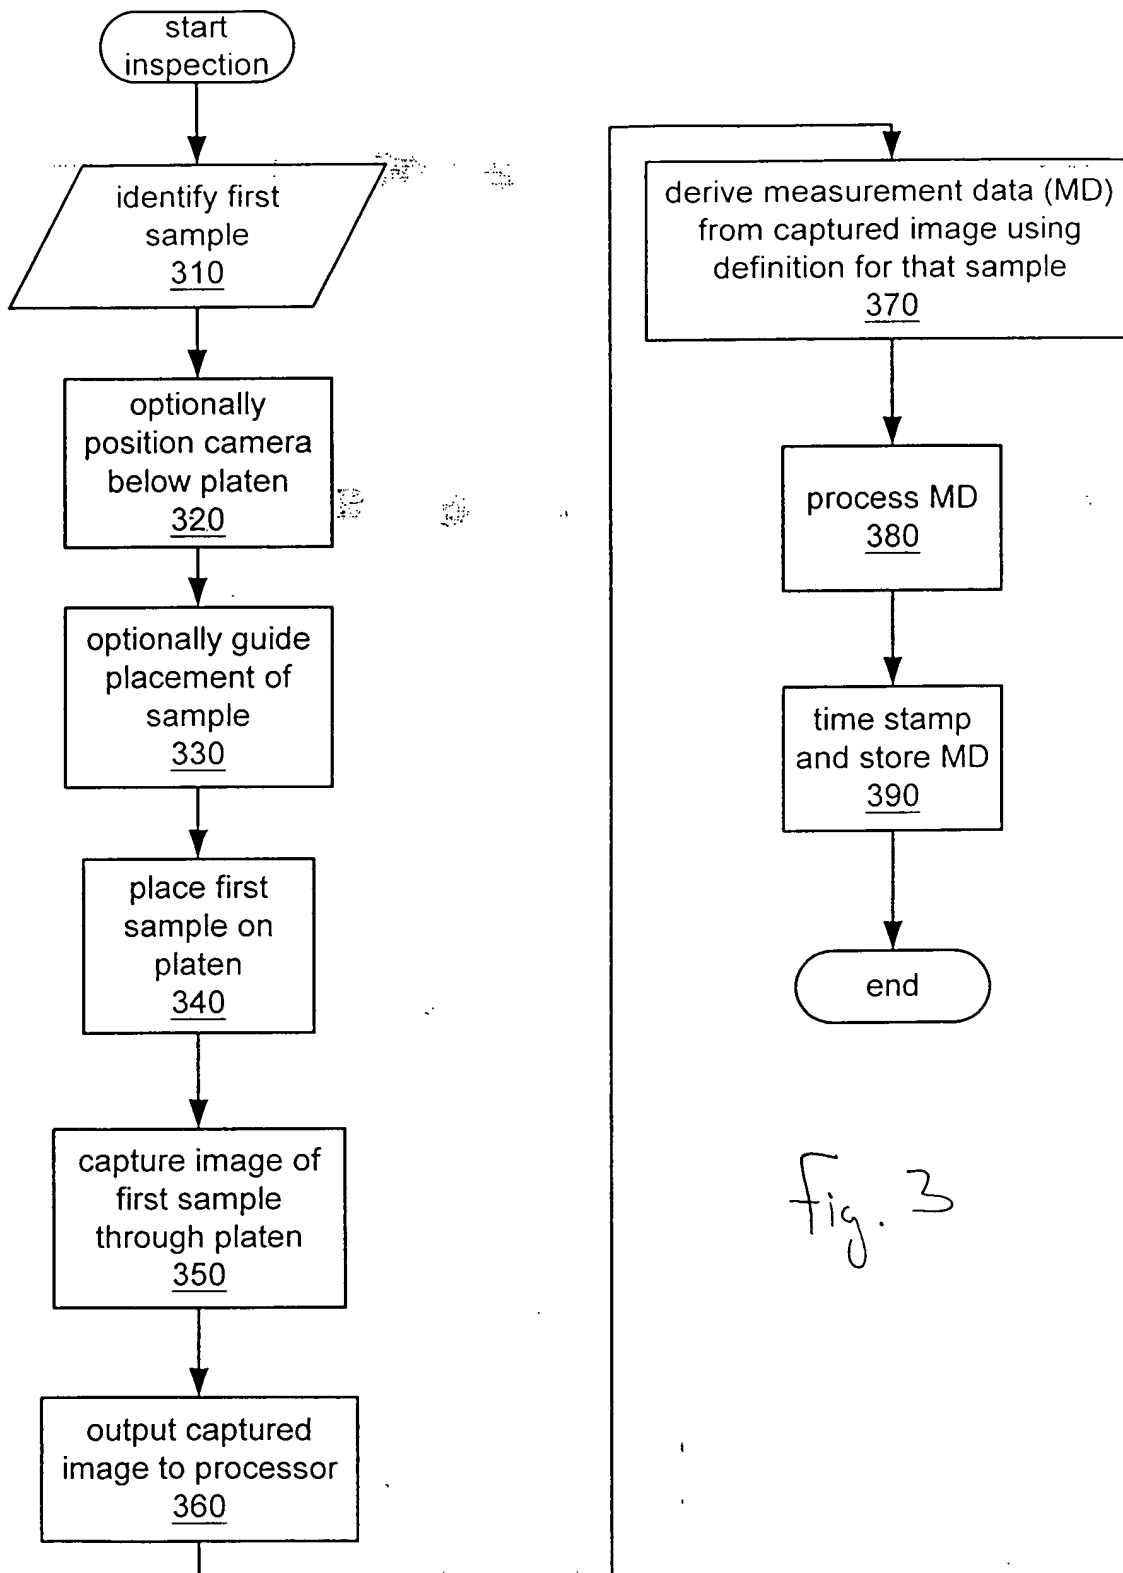


fig. 3

09923026-080601

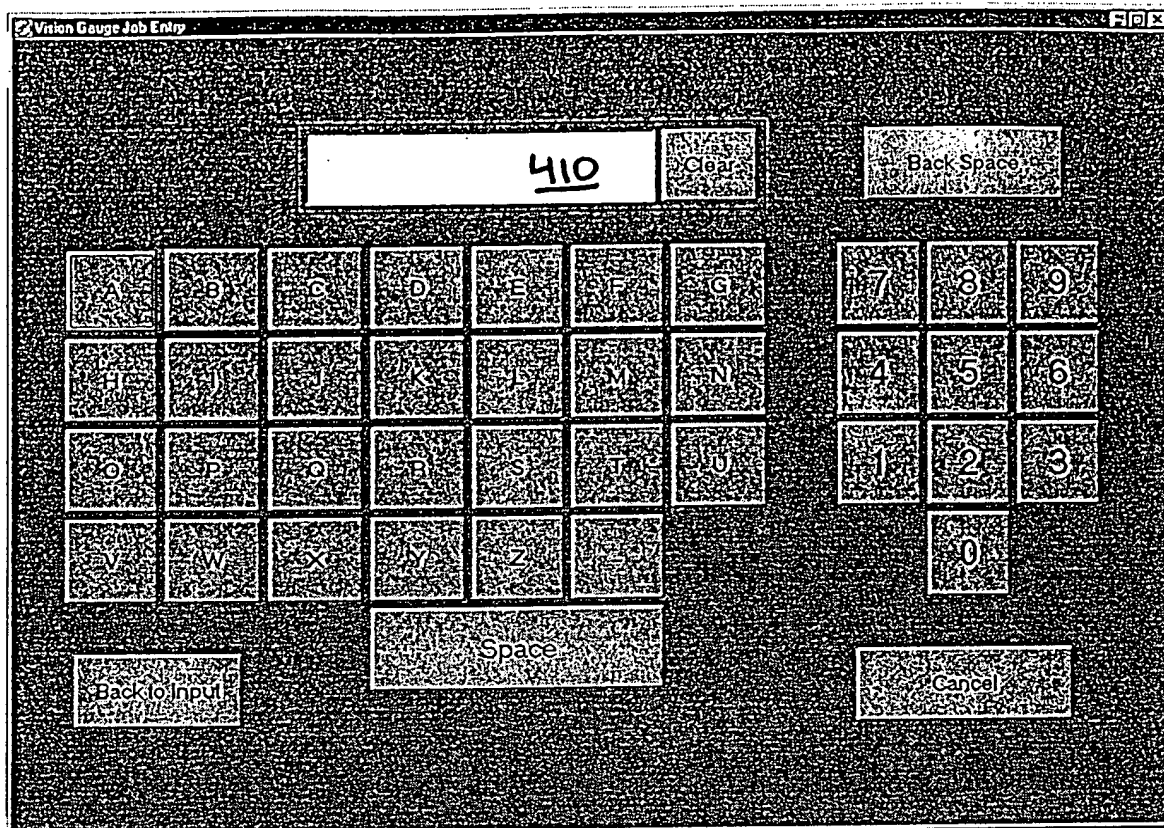

↖
400

Fig. 4

The screenshot shows a window titled "Input Form" with a standard Windows-style title bar. The interface includes several buttons and a data table.

Buttons:

- Number of Data Points to Chart:** A button with the text "Number of Data Points to Chart".
- Clear:** A button with the text "Clear".
- Goto Entry:** A button with the text "Goto Entry" and the value "510" below it.
- Goto Run:** A button with the text "Goto Run" and the value "550" below it.
- Quit:** A button with the text "Quit" and the value "560" below it.
- Management Functions:** A button with the text "Management Functions" and the value "570" below it.

Data Table:

Line	Value
Line 1	9111 520(A)
Line 2	9111 520(B)
Line 3	9111 520(C)
Line 4	MEM-TE 520(D)
Line 5	MEM-TE 520(E)
Line 6	9111 520(F)
Line 7	9111 520(G)
Line 8	925 520(H)
Line 9	925 520(I)
Line 10	mem-tes 520(J)
Line 11	925 520(K)
Line 12	9111 520(L)

500

Fig. 5

109080 02022600


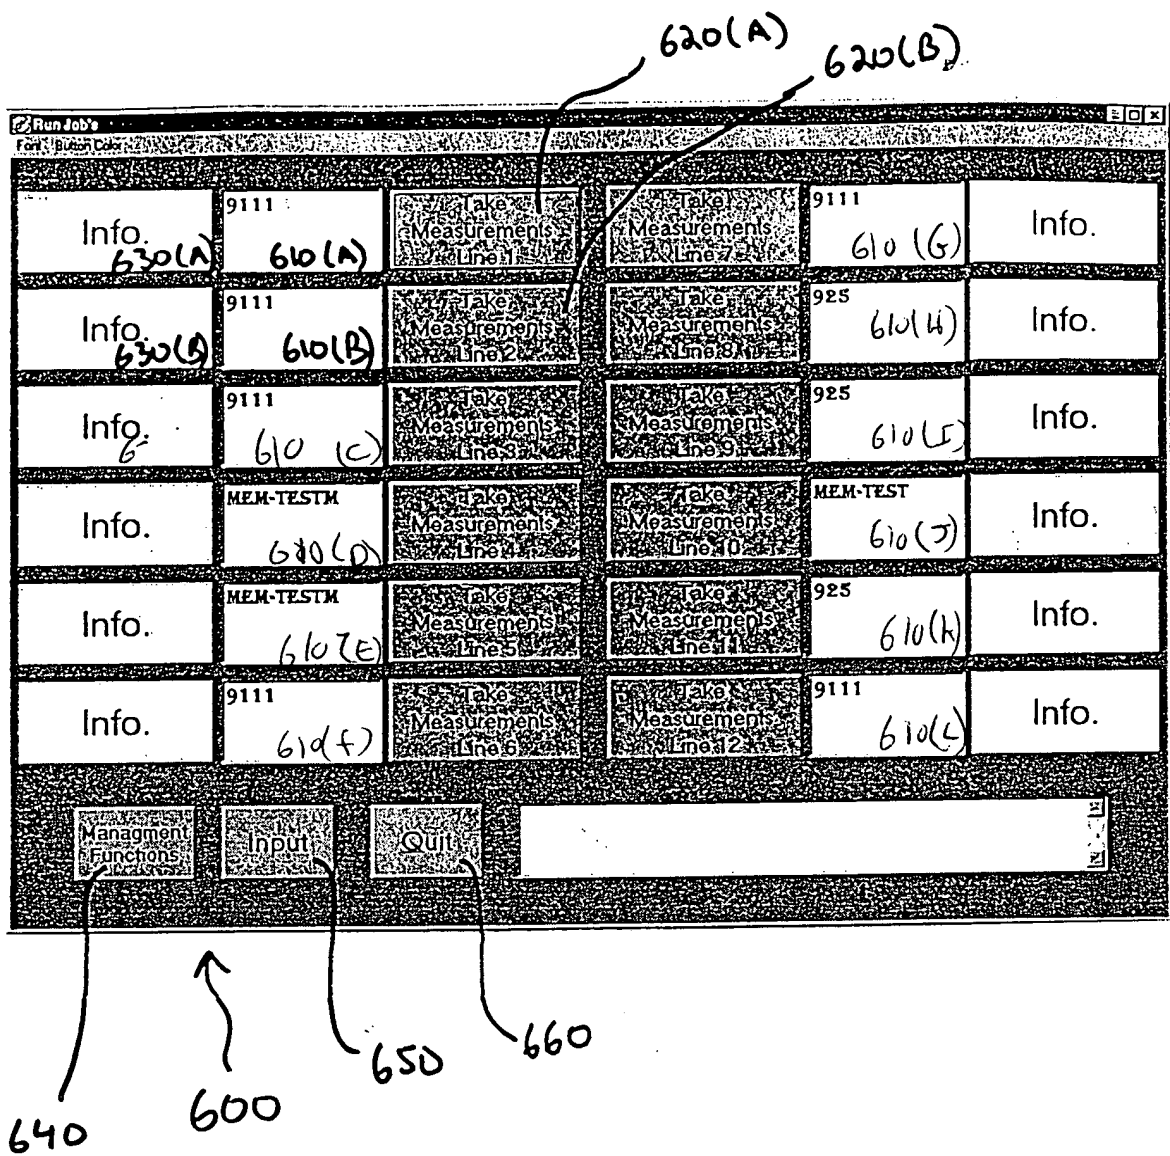


Fig. 6


00023028-080601

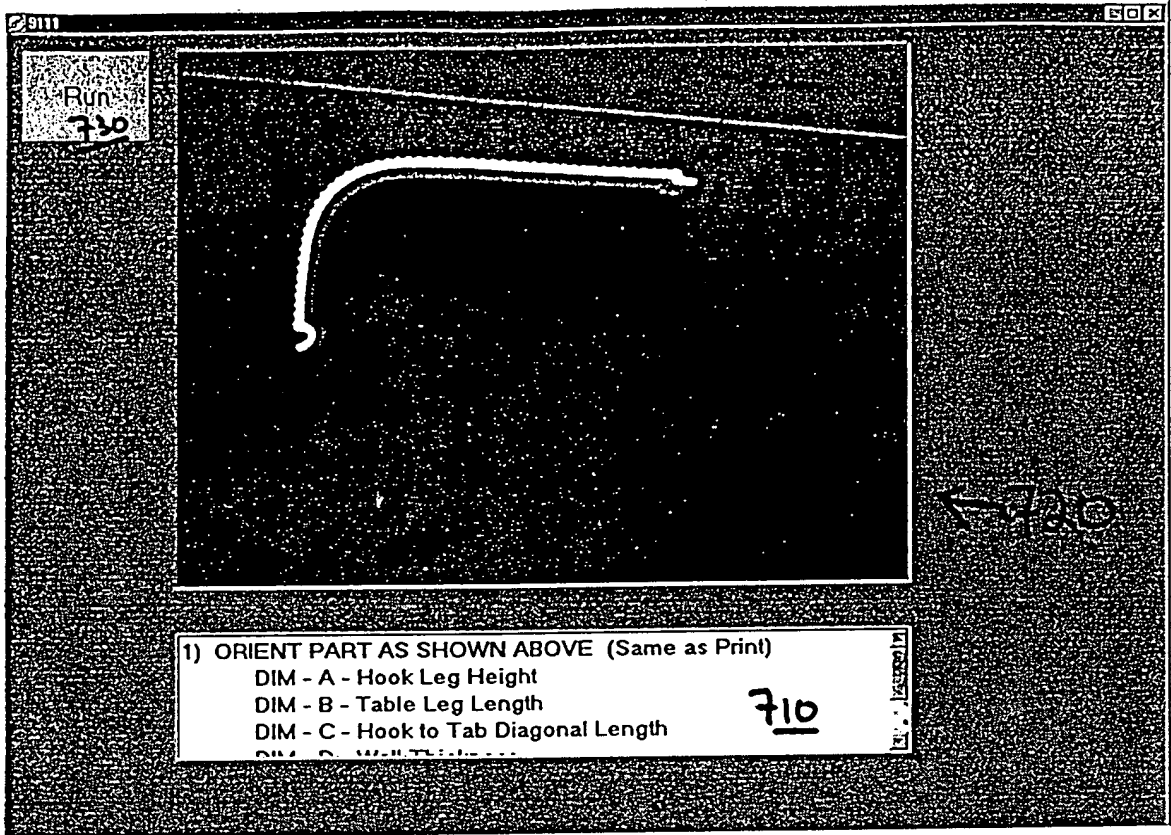

700

Fig. 7

00923029-090601

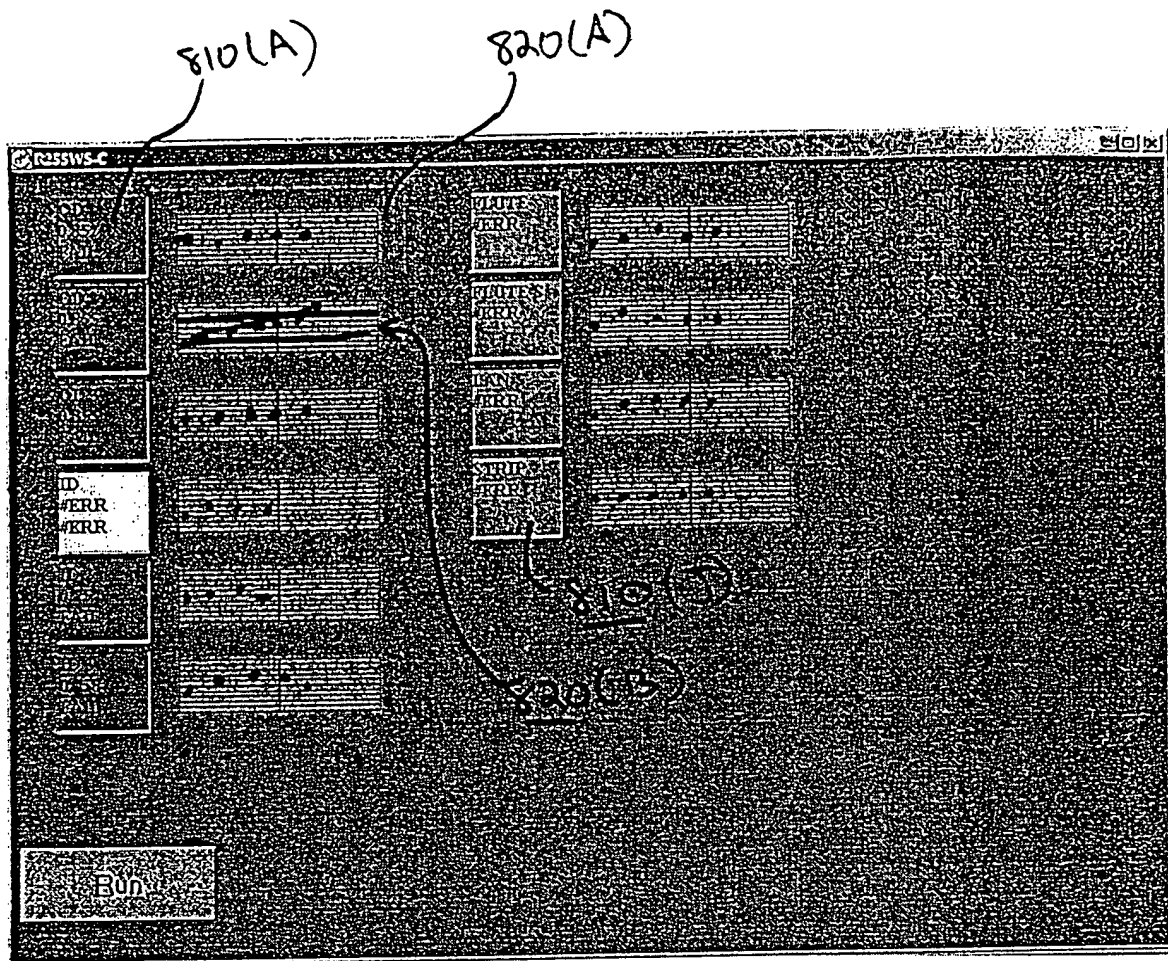

↑ 800

Fig. 8

The screenshot shows the 'Vision Gauge Management Functions' screen. At the top, there's a title bar with standard window controls. Below it, the main interface is divided into several sections. On the left, there are input fields for 'Part Number' and 'Line Number (01-19)'. The central area features a large display showing the number '1010'. To the right of the display are buttons for 'Return', 'Back Space', and 'Tab'. Below the display is a large alphanumeric keypad with letters A-Z and numbers 0-9. To the right of the keypad are buttons for 'Clear', 'Edit Part Info', 'Save as Part Info', and 'Change/Dissable Password'. At the bottom, there are buttons for 'Advanced', 'Change Password', 'Enable Password', and 'Input'.

1000

Fig. 10

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.